(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 11 August 2005 (11.08.2005)

PCT

(10) International Publication Number WO 2005/072387 A2

(51) International Patent Classification: Not classified

(21) International Application Number:

PCT/US2005/002612

(22) International Filing Date: 31 January 2005 (31.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/539,948 29 January 2004 (29.01.2004) US

(71) Applicant (for all designated States except US): GLACIER GARLOCK BEARINGS, INC. [US/US]; 700 Mid Atlantic Parkway, Thorofare, New Jersey 08086 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): ASFOUR, Albert [US/US]; 5425 Washakie Trail, Brighton, Michigan 48116 (US). JENDRO, Michael [US/US]; 7514 Barnsley Drive, Johnston, Iowa 50131 (US). **KIM, Michael** [US/US]; 14 Ridgemount Drive, Marlton, New Jersey 08053 (US). **SAILE, Richard** [US/US]; 120 Midway Drive, Phoenixville, Pennsylvania 19460 (US).

- (74) Agents: HARRINGTON, John, M. et al.; Kilpatrick Stockton LLP, 1001 West Fourth Street, Winston-Salem, North Carolina 27101 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: BEARING WITH INTEGRAL SEAL

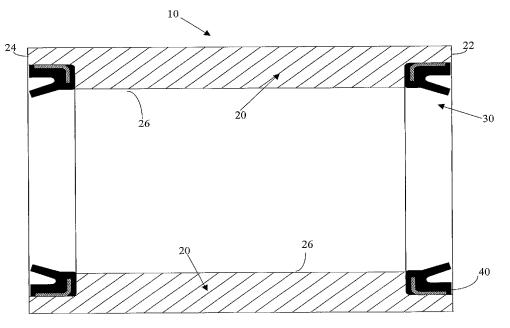

(57) Abstract: A seal assembly including an annular filament wound bearing having a first end and a second end and a large longitudinal central aperture, with the first and second ends having a counterbore formed in an interior wall surface of the bearing, the counterbores begin defined by an axially inner surface and a radially outer surface, and a seal disposed within each of the counterbores contacting at least one of said axially inner surface or said radially outer surface of the counterbore, the seal comprising a body portion and an radially inward extending sealing lip.

WO 2005/072387 A2

European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

 without international search report and to be republished upon receipt of that report